



STAR HEADLIGHT & LANTERN CO.

281 BEACON



281-DIN



281-FDIN

281




- White - SYNC
- Red - HOT
- Black - GROUND
- Green - PATTERN SELECT

Specifications and Features

- Star X-Fire™ technology
- 12 different selectable flash patterns in either of two phases, plus steady-on
- Durable polycarbonate lens
- Lightweight, polycarbonate base
- Three bolt permanent mount, 12mm single bolt, magnet mount, Din and Flexi-Din mount available
- Slotted mounting hole accommodate SAE and 3 bolt DIN mount
- S-Link System™ synchronizing capabilities (on the 281 model only) with other Star LED units
- Sync. to alternating or simultaneous flash
- Dimensions: 144mm (6^{43/64}") H x 152mm (6") Dia.
- Voltage: perm. mount 9-32V DC, mag. mount - 9-16V DC
- Amp draw: 0.5 amps
- Weight: 1.36 kg
- LED Colours:
- Lens Colours:

[151]
∅ 6.0 B.C.
SPACED EVENLY 120°

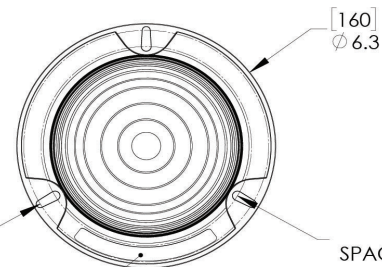

[160]
∅ 6.3

[130]
∅ 5.1 B.C.
SPACED EVENLY 120°

Model Numbers/Descriptions:

281	Three hole mount, selectable flash pattern sync. available
281B	One bolt mount, selectable flash pattern sync. available
281M	Magnet mount, selectable flash pattern on cig. plug
281DIN	Din mount, pre set to ECE Reg 65 flash pattern
281FDIN	Flexi-Din mount, pre set to ECE Reg 65 flash pattern